


Product Features

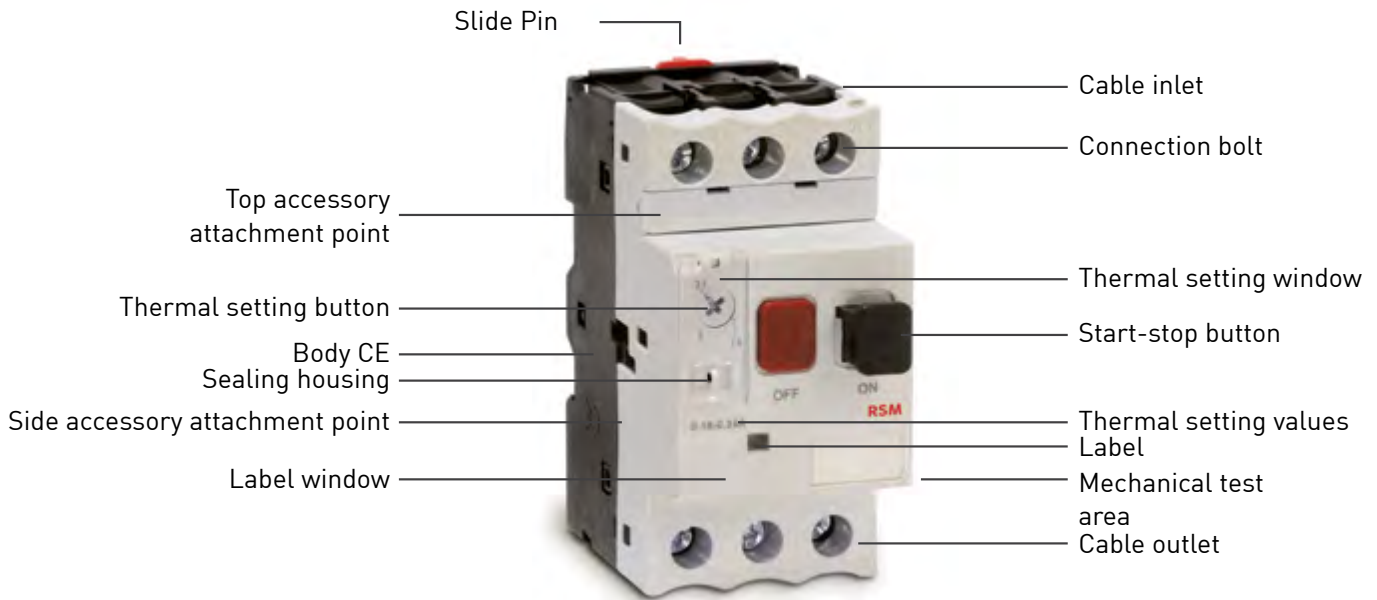

Thermal Magnetic Motor Protection Breakers

Code No	Nominal Power AC3 400V (kW), 50/60Hz	Thermal Setting Field [A] (40°)	Short Circuit Breaking Capacity (KA) 400V-415V	Pcs In Box	Pcs In Package
1242.010.1	0,02	0,10-0,16	100 kA	1	50
1242.010.2	0,06	0,16-0,25	100 kA	1	50
1242.010.3	0,09	0,25-0,40	100 kA	1	50
1242.010.4	0,12	0,40-0,63	100 kA	1	50
1242.010.5	0,25	0,63-1,00	100 kA	1	50
1242.010.6	0,37	1,00-1,60	100 kA	1	50
1242.010.7	0,75	1,60-2,5	100 kA	1	50
1242.010.8	1,5	2,5-4	100 kA	1	50
1242.010.9	2,2	4-6,3	100 kA	1	50
1242.010.10	4	6-10	100 kA	1	50
1242.010.11	5,5	9-14	15 kA	1	50
1242.010.12	7,5	13-18	15 kA	1	50
1242.010.13	9	17-23	15 kA	1	50
1242.010.14	11	20-25	15 kA	1	50
1242.010.15	15	24-32	10 kA	1	50

Accessories

Product Name	Code No	Technical Features	Pcs In Box	Pcs In Package
Storage Box (Empty)	1242.011.1	-	1	50
Auxiliary Contact (Mounted on Left)	1242.012.1	1NO +1NC	1	100
Auxiliary Contact (Mounted on Front)	1242.013.1	1NO +1NC	4	400
Shunt Release	1242.014.1	220 V AC	1	50
Under Voltage	1242.015.1	220V AC	1	50
Alarm Outlet Contact Release	1242.016.1	1NO +1NC	1	100

MOTOR PROTECTION STARTERS

RSM



Storage Box



Under Voltage Release



Shunt Release



Alarm Outlet Contact




Auxiliary Contact (Mounted Left)



Auxiliary Contact (Mounted on Front)

Technical Drawings

Motor Protection Breaker

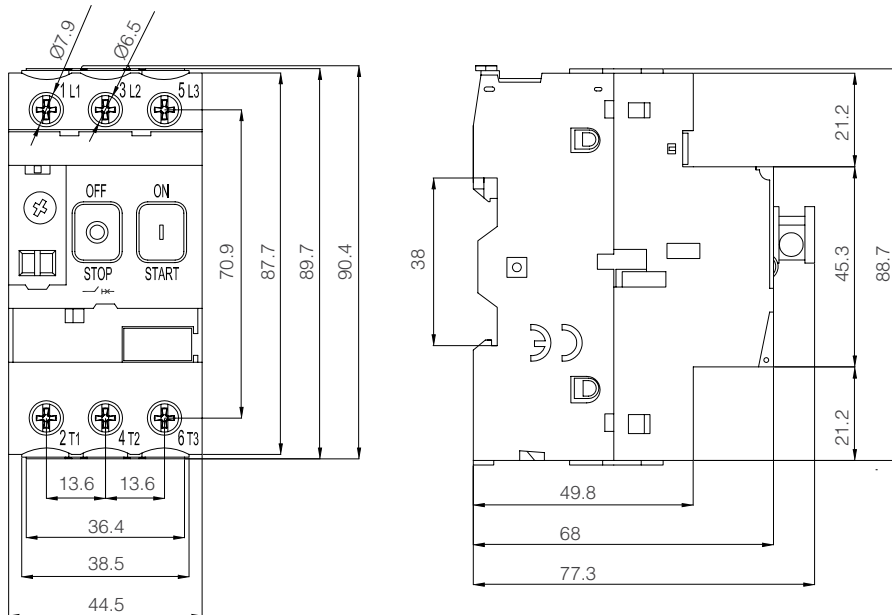

Wiring Diagrams

