


# MULTI-COLOR BEACONS

Code No	Illumination	Features	Nominal Voltage	Pcs in Box
2150.01.1	Led	With Buzzer	24 V AC / DC	1
2150.01.2	Led	With Buzzer	220 V AC / DC	1
2150.01.3	Led	-	24 V AC / DC	1
2150.01.4	Led	-	220 V AC / DC	1
2150.01.5	Led	PLC Harmonized	24 V DC	1
2150.01.6	Led	PLC Harmonized + With Buzzer	24 V DC	1
2150.01.7		Pipe Adaptation Part		1
2150.01.8		20 mm Aluminum With Base		1

- Single Body, Multicolor
- Ø22 mm with nut connection
- Flashing and normal LED mode available in same moduler
- 90 dB Buzzer

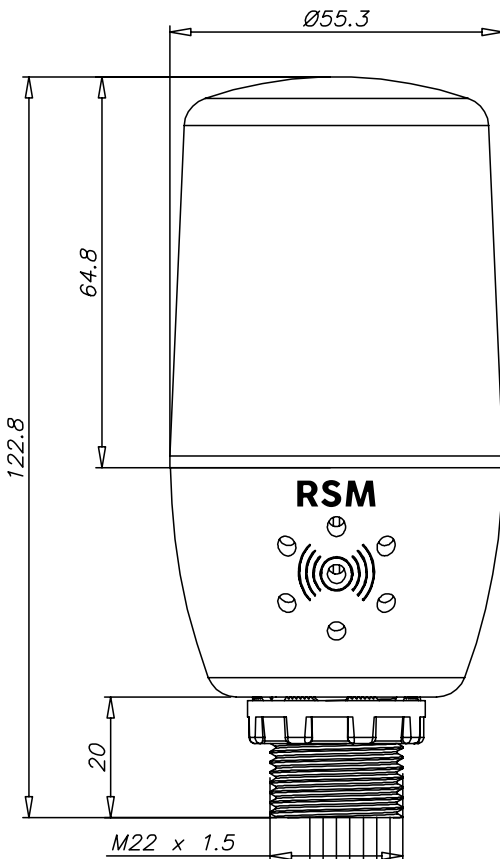

## General Features

- Heat resistant, clear vision polycarbonate modules
- LED
- Easy and tool free connection
- Easy Wiring
- Buzzer option
- Ø22mm with nut connection

## Teknik Bilgiler

Mechanical Life	: 1000 assembly cycle
Electrical Life	: 10.000 hour
Operating Temperature	: min./max. °C -5/+40
Operating Voltage (Ue)	: 24 V AC / DC - 220V AC / DC
Insulation Voltage (Ui)	: 300 V
Protection Degree	: IP65
Frequency (f)	: 50 Hz
Power consumption ((24V/220V))	: 1,5W/3,5W
Volume (SP)	: 80-90 d
Standard	: TS EN 60947-1 TS EN 60947-5-1 TS EN 60947-5-1/A1

